





MASCHI A MACCHINA - MACHINE TAPS


MASCHI A MACCHINA **HSSE M35 5%Co**
SCANALATURE DIRITTE - Imbocco "C"
 Filettatura **PG** per tubi corazzati - DIN 40430


MACHINE TAPS HSSE M35 5%Co
STRAIGHT FLUTES - Chamfer form "C"
PG steel conduit Thread - DIN 40430

 **HSSE**



DIN 40432

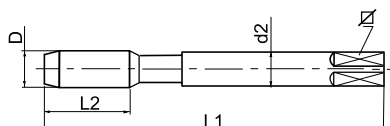

D	filetti x 1" TPI	Ø mm	DIN 40430					4555	4555.T
			L ₁	L ₂	d ₂	□			TIN
n. 7	20	12,50	70	20	9,0	7,0	11,40	60,06	76,45
n. 9	18	15,20	70	20	12,0	9,0	14,00	76,78	100,54
n. 11	18	18,60	80	22	14,0	11,0	17,25	88,00	118,91
n. 13,5	18	20,40	80	22	16,0	12,0	19,00	110,77	144,98
n. 16	18	22,50	80	22	18,0	14,5	21,25	128,70	173,80
n. 21	16	28,30	90	22	22,0	18,0	27,00	143,77	225,83
n. 29	16	37,00	100	25	28,0	22,0	35,50	254,65	364,76
° n. 36	16	47,00	140	25	36,0	29,0	45,50	443,52	638,44

°Acciaio HSS / HSS steel

Materiali / Application: **4555:** P1 - P2 - P3 - P4 / K4 / N2 - N3 / N7 - N8 / N11
4555.T: P1 - P2 - P3 - P4 / K4 / N2 - N3 / N7 - N8 / N11