

UNF

MASCHI A MACCHINA - MACHINE TAPS

MASCHI A MACCHINA A RULLARE **HSS-Co-8%**

Filettatura ASME B1.1 a passo fine **UNF - 2BX**

Con canalini laterali di lubrificazione - Imbocco "C"

Rivestimento TIN

COLD FORMING MACHINE TAPS HSS-Co-8%

ASME B1.1 Unified Fine Thread **UNF - 2BX**


With lateral lubrication little flutes - Chamfer form "C"

TIN coated


 HSS-Co-8%




4577.T



DIN 371 D ≤ 3/8 UNF



DIN 374 D ≥ 7/16 UNF

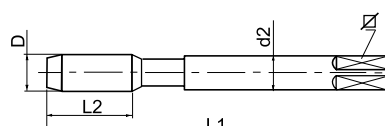

DIN 371 / DIN 374							4577.T
D	filetti x 1" TPI	L ₁	L ₂	d ₂	□	□	TIN
n. 6	40	56	11	4,0	3,0	3,20	48,84
n. 8	36	63	13	4,5	3,4	3,85	48,84
n. 10	32	70	13	6,0	4,9	4,45	48,84
1/4	28	80	16	7,0	5,5	5,90	48,84
5/16	24	90	18	8,0	6,2	7,45	54,12
3/8	24	90	15	10,0	8,0	9,00	64,46
7/16	20	100	20	8,0	6,2	10,50	81,51
1/2	20	100	20	9,0	7,0	12,10	84,81
9/16	18	100	22	11,0	9,0	13,70	115,94
3/4	16	110	25	14,0	11,0	18,40	160,60
1"	12	140	28	18,0	14,5	24,45	191,40

Materiali / Application: P1 - P2 - P3 - P4 / M1 - M2 - M3 / N1 - N2 - N3 / N6 - N7