

## MASCHI A MACCHINA - MACHINE TAPS

MASCHI A MACCHINA **HSSE M35 5%Co**

SCANALATURE DIRITTE con IMBOCCO CORRETTO - forma "B"


Filettatura ISO 228/1 - GAS cilindrica BSP

MACHINE TAPS **HSSE M35 5%Co**


STRAIGHT FLUTES SPIRAL POINT (GUN NOSE) - Chamfer form "B"


ISO 228/1 - Whitworth pipe thread BSP

 HSSE



**DIN 5156**

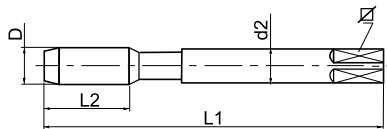

DIN 5156								4543.1	4543.V1	4543.T1	4843.1
D	filetti x 1" TPI	∅ mm	L <sub>1</sub>	L <sub>2</sub>	d <sub>2</sub>	∠		nudi / naked	ST	TIN	ISO 228 + 0,1
1/8	28	9,73	90	15	7,0	5,5	8,80	28,27	32,78	42,79	•
1/4	19	13,16	100	22	11,0	9,0	11,80	38,28	43,78	57,75	•
3/8	19	16,66	100	22	12,0	9,0	15,25	53,90	60,94	75,68	•
1/2	14	20,96	125	25	16,0	12,0	19,00	72,05	80,52	106,04	•
5/8	14	22,91	125	25	18,0	14,5	21,00	92,29	-	-	-
3/4	14	26,44	140	25	20,0	16,0	24,50	120,89	142,78	171,16	-
7/8	14	30,20	150	28	22,0	18,0	28,25	155,21	-	-	-
1"	11	33,25	160	30	25,0	20,0	31,00	224,62	243,32	298,54	-
1 1/8"	11	37,90	170	30	28,0	22,0	35,50	277,75	-	-	-
1 1/4"	11	41,91	170	30	32,0	24,0	39,50	337,48	-	-	-
° 1.1/2	11	47,80	190	32	36,0	29,0	45,50	499,51	-	-	-
° 2"	11	59,61	220	40	45,0	35,0	57,00	977,90	-	-	-
°Acciaio HSS / HSS Steel											
*Prezzo a richiesta / Price on demand											
Materiali / Application: <b>nudo / naked:</b> P1 - P2 - P3 - P4 / N1 - N2 / N6 - N7 <b>ST:</b> P1 - P2 - P3 - P4 / N1 - N2 / N6 - N7 <b>TIN:</b> P1 - P2 - P3 - P4 / K3 - K4 / N1 - N2 - N3 / N6 - N7											