

MASCHI A MACCHINA - MACHINE TAPS

MASCHI A MACCHINA **HSSE-PM**

SCANALATURE ELICOIDALI - **ELICA DESTRA 45°** - Imbocco "C"

Filettatura metrica ISO/DIN 13 - UNI 4535 a passo grosso - **6HX**

MACHINE TAPS **HSSE-PM**

SPIRAL FLUTES - **RIGHT HELIX 45°** - Chamfer form "C"

ISO Metric Coarse Thread - UNI 4535 - DIN 1 - **6HX**

 HSSE-PM







4512.5
4514.5




4512.V5
4514.V5




4512.T5
4514.T5




DIN 371 D ≤ 10mm.

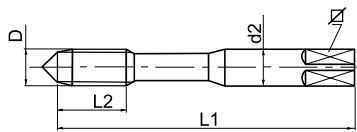

DIN 376 D ≥ 12mm.

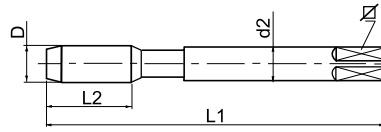

DIN 371 / DIN 376							4512.5	4514.5	4512.V5	4514.V5	4512.T5	4514.T5
D	p	L ₁	L ₂	d ₂	□		nudi/naked	nudi/naked	ST	ST	TIN+	TIN+
3	0,5	56	5	3,5	2,7	2,50	22,22	-	26,29	-	32,89	-
4	0,7	63	7	4,5	3,4	3,30	22,22	-	26,29	-	32,89	-
5	0,8	70	8	6,0	4,9	4,20	22,22	-	26,29	-	32,89	-
6	1	80	10	6,0	4,9	5,00	22,22	-	26,29	-	32,89	-
8	1,25	90	13	8,0	6,2	6,75	24,97	-	29,26	-	37,07	-
10	1,5	100	15	10,0	8,0	8,50	32,12	-	36,52	-	47,85	-
12	1,75	110	18	9,0	7,0	10,25	-	39,93	-	44,77	-	57,20

Altre dimensioni su richiesta / Other dimensions on demand

Materiali / Application: **nudo / naked:** P1 - P2 - P3 - P4 / N2 / N6 - N7

ST: P1 - P2 - P3 - P4 / M1 - M2

TIN +: P2 - P3 - P4 - P5 / N3 / N7

N.B.: ≥ M8 centro femmina / ≥ M8 female center