

MASCHI A MACCHINA - MACHINE TAPS

MASCHI A MACCHINA **HSSV**

SCANALATURE ELICOIDALI - **ELICA DESTRA 48°** - Imbocco "C"

Filettatura metrica ISO/DIN 13 - UNI 4535 a passo grosso - **6HX**

Rivestimento HPC per INOX

MASCHIATURA RIGIDA SINCRONIZZATA

MACHINE TAPS **HSSV**

SPIRAL FLUTES - **RIGHT HELIX 48°** - Chamfer form "C"

ISO Metric Coarse Thread - UNI 4535 - DIN 13 - **6HX**

HPC coated for STAINLESS STEEL


RIGID TAPPING SYNCHRO




 HSSV




4512.S8
4514.S8




DIN 371 D ≤ 10mm.



DIN 376 D ≥ 12mm.

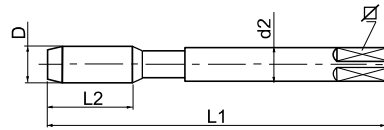

DIN 371 / DIN 376							4512.S8	4514.S8
D	p	L ₁	L ₂	d ₂	∠			
3	0,5	56	5	3,5	2,7	2,50	33,44	-
4	0,7	63	7	4,5	3,4	3,30	33,44	-
5	0,8	70	8	6,0	4,9	4,20	34,32	-
6	1	80	10	6,0	4,9	5,00	34,32	-
8	1,25	90	13	8,0	6,2	6,75	40,04	-
10	1,5	100	15	10,0	8,0	8,50	46,31	-
12	1,75	110	18	9,0	7,0	10,25	-	59,51
14	2	110	20	11,0	9,0	12,00	-	77,44
16	2	110	20	12,0	9,0	14,00	-	88,00
18	2,5	125	25	14,0	11,0	15,50	-	118,03
20	2,5	140	25	16,0	12,0	17,50	-	132,22

Altre dimensioni su richiesta / Other dimensions on demand

Materiali / Application: P3 - P4 - P5 / M1 - M2 - M3 - M4

N.B.: ≥ M8 centro femmina / ≥ M8 female center

A richiesta: con foro centrale di lubro-refrigerazione a partire da M6

On demand: with central hole starting from M6