

MASCHI A MACCHINA - MACHINE TAPS

MASCHI A MACCHINA A RULLARE HSS-Co-PM

Con canalini laterali di lubrificazione - Imbocco "C"

Filettatura metrica ISO/DIN 13 - UNI 4535 a passo grosso

Rivestimento Super TIN (TIN+)

COLD FORMING MACHINE TAPS HSS-Co-PM

With lateral lubrication little flutes - Chamfer form "C"

ISO Metric Coarse Thread - UNI 4535 - DIN 13

Super TIN coated (TIN+)

 HSS-Co-PM

6HX




4517.XH


6GX




4517.XG




DIN 371 D ≤ 10mm.

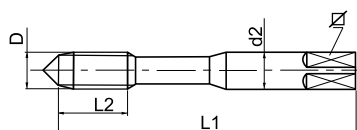

DIN 376 D ≥ 12mm.

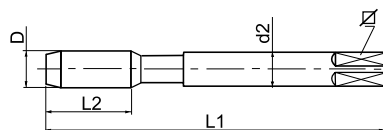

D	DIN 371 / DIN 376						4517.XH	4517.XG
	p	L ₁	L ₂	d ₂	∠		6HX	6GX
3	0,5	56	10	3,5	2,7	2,80	46,75	51,48
4	0,7	63	13	4,5	3,4	3,70	46,75	51,48
5	0,8	70	13	6,0	4,9	4,65	46,75	51,48
6	1	80	16	6,0	4,9	5,55	46,75	51,48
8	1,25	90	18	8,0	6,2	7,40	53,68	58,96
10	1,5	100	20	10,0	8,0	9,30	64,57	70,95
12	1,75	110	25	9,0	7,0	11,20	78,32	86,02
14	2	110	28	11,0	9,0	13,10	96,25	105,93
16	2	110	28	12,0	9,0	15,10	121,44	133,98
18	2,5	125	33	14,0	11,0	16,90	133,65	-
20	2,5	140	33	16,0	12,0	18,90	151,80	-
22	2,5	140	33	18,0	14,5	20,90	156,31	-
24	3	160	39	18,0	14,5	22,70	203,72	-

Materiali / Application: P3 - P4 - P5 / M2 - M3 - M4

N.B.: ≥ M6 centro femmina / ≥ M6 female center

NEW