

## MASCHI A MACCHINA - MACHINE TAPS

MASCHI A MACCHINA **HSS-Co-PM**

SCANALATURE DIRITTE - imbocco "C"

Filettatura metrica ISO/DIN 13 - UNI 4535 a passo grosso - **6HX**

**Rivestimento HPC**

**MASCHIATURA RIGIDA SINCRONIZZATA**

MACHINE TAPS **HSS-Co-PM**



STRAIGHT FLUTES - Chamfer form "C"

ISO Metric Coarse Thread - UNI 4535 - DIN 13 - **6HX**

**HPC coated**

**RIGID TAPPING SYNCHRO**



 HSS-Co-PM




4511.XS2



4511.XC2




**DIN 371**

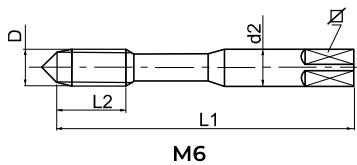


M6

**DIN 371**

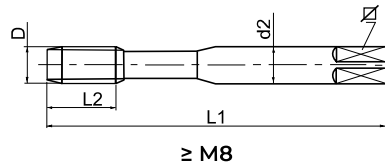

≥ M8

DIN 371							4511.XS2	4511.XC2
D	p	L <sub>1</sub>	L <sub>2</sub>	d <sub>2</sub>	∅			FORO CENTRALE with central hole
6	1	80	10	6,0	4,9	5,00	47,85	78,98
8	1,25	90	13	8,0	6,2	6,80	51,26	75,46
10	1,5	100	15	10,0	8,0	8,50	59,29	94,71
12	1,75	110	18	<b>12,0</b>	9,0	10,30	73,59	112,53
16	2	110	20	<b>16,0</b>	12,0	14,00	112,75	155,32

Materiali / Application : P5 - P6 / K1 - K2 - K3 - K4 - K5 / N4 - N5 / N8 - N9 / N11 - N12

**N.B.:** d<sub>2</sub> tolleranza h6 / d<sub>2</sub> tolerance h6