



Alu-titane

Alu-titan

Alu-titanio
Alluminio-titanio

Hélice 45° - Forte dépouille

Pour des matières ductiles et abrasives.

45° Spiral - Special relieving

For tensile and abrasive materials.

Hélice 45° - Destalonado positivo

Para materiales dúctiles y abrasivos.


Elica 45° - Spoglia accentuata

Per materiali duttili ed abrasivi.




$$\ell = 2,5 \sim 3 \times D$$

CARBURE CARBIDE
Metallo duro



D -0,01	L	ℓ	d2 h5	magaforce 8528	Alu-Titane 8528-AL
0,5	39	1,5	3	41,34 €	48,64 €
0,6	39	1,5	3	42,56 €	49,85 €
0,8	39	2	3	43,78 €	51,08 €
1,0	39	3	3	46,22 €	53,51 €
1,2	39	4	3	47,42 €	54,73 €
1,5	39	4	3	48,64 €	55,95 €
2,0	39	5	3	52,29 €	59,58 €
2,5	39	7	3	58,37 €	65,67 €

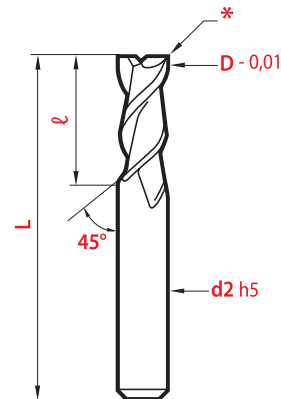

* 0,05 x D

Chanfrein de renfort
frontal dépouillé
Relieved frontal
reinforcement chamfer
Chafflón de refuerzo
en destalonado frontal
Bordino di rinforzo
frontale spogliato

CONDITIONS D'UTILISATION CONDICIONES DE CORTE PARA

RECOMMENDATIONS FOR THE USE CONDIZIONI DI IMPIEGO

Ø	Vc	n	fz	vf
0,5	150 ~ 200	95000	0,01	1900
1		50000	0,015	1500
2		28000	0,03	1680
4		16000	0,06	1920