

## MASCHI A MACCHINA - MACHINE TAPS

MASCHI A MACCHINA **HSSE M35 5%Co**

SCANALATURE ELICOIDALI - ELICA DESTRA 15° - Imbocco "C"


Filettatura ISO 228/1 - GAS cilindrica BSP

MACHINE TAPS **HSSE M35 5%Co**


SPIRAL FLUTES - RIGHT HELIX 15° - Chamfer form "C"


ISO 228/1 - Whitworth pipe thread BSP

 HSSE



**DIN 5156**

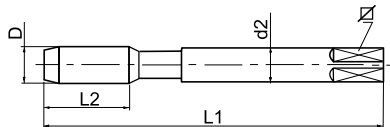

D	filetti x 1" TPI	Ø mm	DIN 5156					4544.1	4544.V1	4544.T1
			L <sub>1</sub>	L <sub>2</sub>	d <sub>2</sub>	□		nudi / naked	ST	TIN
1/8	28	9,73	90	15	7,0	5,5	8,80	27,94	32,56	42,46
1/4	19	13,16	100	22	11,0	9,0	11,80	38,50	45,10	57,75
3/8	19	16,66	100	22	12,0	9,0	15,25	52,36	58,41	76,12
1/2	14	20,96	125	25	16,0	12,0	19,00	71,50	79,64	104,17
3/4	14	26,44	140	25	20,0	16,0	24,50	121,55	143,00	171,16
1"	11	33,25	160	30	25,0	20,0	31,00	224,62	244,20	303,38
1 1/8"	11	37,90	170	30	28,0	22,0	35,50	281,38	-	-
1 1/4"	11	41,91	170	30	32,0	24,0	39,50	330,77	-	-
° 1 1/2"	11	47,80	190	32	36,0	29,0	45,50	510,51	-	-
° 2"	11	59,61	220	40	45,0	35,0	57,00	932,58	-	-

° Acciaio HSS / HSS Steel

Materiali / Application: **nudo / naked:** P1 - P2 - P3 - P4 / N1 - N2 / N6 - N7

**ST:** P1 - P2 - P3 - P4 / N1 - N2 / N6 - N7

**TIN:** P1 - P2 - P3 - P4 / K3 - K4 / N1 - N2 - N3 / N6 - N7