

M

MASCHI A MACCHINA - MACHINE TAPS

MASCHI A MACCHINA **HSSE M35 5%Co**

SCANALATURE ELICOIDALI - ELICA DESTRA 40° - Imbocco "C"

Filettatura metrica ISO/DIN 13 - UNI 4535 a passo grosso - **Tolleranza 6H + 0,20**

MACHINE TAPS **HSSE M35 5%Co**

SPIRAL FLUTES - RIGHT HELIX 40° - Chamfer form "C"

ISO Metric Coarse Thread - UNI 4535 - DIN 13 - **Tolerance 6H + 0,20**

 HSSE




4912.3
4914.3




4912.T3
4914.T3




4912.F3
4914.F3




DIN 371 D ≤ 10mm.



DIN 376 D ≥ 12mm.

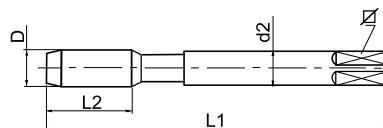

DIN 371 / DIN 376							4912.3	4914.3	4912.T3	4914.T3	4912.F3	4914.F3
D	p	L ₁	L ₂	d ₂	∠		nudi/naked	nudi/naked	TIN	TIN	HPC	HPC
3	0,5	56	5	3,5	2,7	2,50	*	-	*	-	*	-
4	0,7	63	7	4,5	3,4	3,30	*	-	*	-	*	-
5	0,8	70	8	6,0	4,9	4,20	*	-	*	-	*	-
6	1	80	10	6,0	4,9	5,00	*	-	*	-	*	-
8	1,25	90	13	8,0	6,2	6,80	*	-	*	-	*	-
10	1,5	100	15	10,0	8,0	8,50	*	-	*	-	*	-
12	1,75	110	18	9,0	7,0	10,30	-	*	-	*	-	*
14	2	110	20	11,0	9,0	12,00	-	*	-	*	-	*
16	2	110	20	12,0	9,0	14,00	-	*	-	*	-	*

*Prezzo a richiesta / Price on demand

Materiali / Application: **nudo / naked:** P1 - P2 - P3 - P4 / N1 - N2 / N6 - N7
TIN: P1 - P2 - P3 - P4 / K3 - K4 / N1 - N2 - N3 / N6 - N7
HPC: P1 - P2 - P3 - P4 / M1 - M2 / K3 - K4 / N2 - N3 / N7

N.B.: ≥ M8 centro femmina / ≥ M8 female center