

MASCHI A MACCHINA - MACHINE TAPS

MASCHI A MACCHINA **HSSE M35 5%Co**

SCANALATURE DIRITTE con IMBOCCO CORRETTO forma "B"

Filettatura metrica ISO/DIN 13 - UNI 4535 a passo grosso - **Tolleranza 6G**

MACHINE TAPS **HSSE M35 5%Co**

STRAIGHT FLUTES SPIRAL POINT (GUN NOSE) - Chamfer form "B"

ISO Metric Coarse Thread - UNI 4535 - DIN 13 - **Tolerance 6G**

 HSSE




4511.6G1
4513.6G1




4511.6GT1
4513.6GT1




4511.6GF1
4513.6GF1




DIN 371 D ≤ 10mm.



DIN 376 D ≥ 12mm.

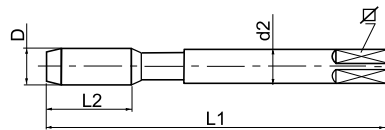

DIN 371 / DIN 376								4511.6G1	4513.6G1	4511.6GT1	4513.6GT1	4511.6GF1	4513.6GF1
D	p	L ₁	L ₂	d ₂	∠		nudi/naked	nudi/naked	TIN	TIN	HPC	HPC	
3	0,5	56	10	3,5	2,7	2,50	22,66	-	31,68	-	35,68	-	
4	0,7	63	13	4,5	3,4	3,30	22,66	-	31,68	-	35,68	-	
5	0,8	70	13	6,0	4,9	4,20	22,66	-	31,68	-	35,68	-	
6	1	80	16	6,0	4,9	5,00	22,66	-	31,68	-	35,68	-	
7	1	80	16	7,0	5,5	6,00	*	-	*	-	*	-	
8	1,25	90	18	8,0	6,2	6,75	25,19	-	37,62	-	46,21	-	
10	1,5	100	20	10,0	8,0	8,50	27,83	-	41,91	-	50,75	-	
12	1,75	110	25	9,0	7,0	10,25	-	37,73	-	56,10	-	67,65	
14	2	110	28	11,0	9,0	12,00	-	*	-	*	-	*	
16	2	110	28	12,0	9,0	14,00	-	*	-	*	-	*	

*Prezzo a richiesta / Price on demand

Altre dimensioni su richiesta / Other dimensions on demand

Materiali / Application: nudo / naked: P1 - P2 - P3 - P4 / N1 - N2 / N7

TIN: P1 - P2 - P3 - P4 / K3 - K4 / N1 - N2 - N3 / N6 - N7

HPC: P1 - P2 - P3 - P4 / M1 - M2 / K3 - K4 / N2 - N3 / N7