

MASCHI A MACCHINA - MACHINE TAPS

MASCHI A MACCHINA A RULLARE **HSS-Co 8%**

Imbocco "C"

Filettatura metrica ISO/DIN 13 - UNI 4535 a passo grosso

Rivestimento TIN


COLD FORMING MACHINE TAPS HSS-Co 8%

Chamfer form "C"


ISO Metric Coarse Thread - UNI 4535 - DIN 13

TIN coated


 HSS-Co 8%




DIN 371 D ≤ 10mm.



DIN 376 D ≥ 12mm.

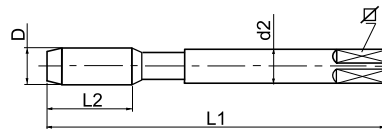

DIN 371 / DIN 376							4516.TH	4516.TG	4517.TH	4517.TG
D	p	L ₁	L ₂	d ₂	∠		6HX	6GX	6HX con canalini with little flutes	6GX con canalini with little flutes
3	0,5	56	10	3,5	2,7	2,80	39,05	42,02	42,24	46,97
4	0,7	63	13	4,5	3,4	3,70	39,05	42,02	42,24	46,97
5	0,8	70	13	6,0	4,9	4,65	39,05	42,02	42,24	46,97
6	1	80	16	6,0	4,9	5,55	39,05	42,02	42,24	46,97
8	1,25	90	18	8,0	6,2	7,40	45,87	48,95	47,74	51,26
10	1,5	100	20	10,0	8,0	9,30	54,89	58,52	58,41	61,93
12	1,75	110	25	9,0	7,0	11,20	69,77	77,92	80,85	78,30
14	2	110	28	11,0	9,0	13,10	86,96	93,27	98,23	100,07
16	2	110	28	12,0	9,0	15,10	110,08	118,62	116,05	-

Materiali / Application: **4516.TH - 4516.TG:** P1 - P2 - P3 / M1 - M2 / N1 - N2 - N3 / N6 - N7
4517.TH - 4517.TG: P1 - P2 - P3 - P4 / M1 - M2 - M3 / N1 - N2 - N3 / N6 - N7

N.B.: ≥ M6 centro femmina / ≥ M6 female center

Filettatura sinistra su richiesta / Left hand on demand