

MASCHI A MACCHINA - MACHINE TAPS

MASCHI A MACCHINA HSS-Co-PM

SCANALATURE ELICOIDALI - **ELICA DESTRA 45°** - Imbocco "C"

Filettatura metrica ISO/DIN 13 - UNI 4535 a passo grosso - **6HX**

Rivestimento TX **Universali**

MASCHIATURA RIGIDA SINCRONIZZATA

MACHINE TAPS HSS-Co PM

SPIRAL FLUTES - **RIGHT HELIX 45°** - Chamfer form "C"

ISO Metric Coarse Thread - UNI 4535 - DIN 13 - **6HX**

TX coated **Universal use**

RIGID TAPPING SYNCHRO



HSS-Co-PM



4512.U5
4514.U5





4512.UC5
4514.UC5



DIN 371 D ≤ 10mm.

DIN 376 D ≥ 12mm.

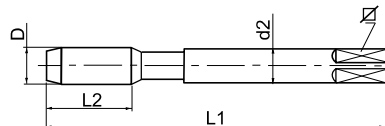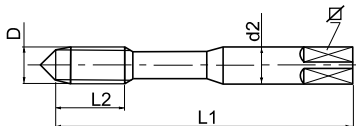

DIN 371 / DIN 376							4512.U5	4514.U5	4512.UC5	4514.UC5
D	p	L ₁	L ₂	d ₂	∅				FORATI with central hole	FORATI with central hole
3	0,5	56	5	3,5	2,7	2,50	35,64	-	-	-
4	0,7	63	7	4,5	3,4	3,30	35,64	-	-	-
5	0,8	70	8	6,0	4,9	4,20	35,64	-	-	-
6	1	80	10	6,0	4,9	5,00	36,74	-	63,58	-
8	1,25	90	13	8,0	6,2	6,75	44,11	-	76,34	-
10	1,5	100	15	10,0	8,0	8,50	50,27	-	80,30	-
12	1,75	110	18	9,0	7,0	10,25	-	59,95	-	94,05
14	2	110	20	11,0	9,0	12,00	-	79,53	-	119,13
16	2	110	20	12,0	9,0	14,00	-	89,32	-	141,24
18	2,5	125	25	14,0	11,0	15,50	-	150,37	-	194,70
20	2,5	140	25	16,0	12,0	17,50	-	172,59	-	220,77
22	2,5	140	25	18,0	14,5	19,50	-	209,77	-	-
24	3	160	30	18,0	14,5	21,00	-	250,58	-	307,78

NEW

Altre dimensioni su richiesta / Other dimensions on demand

Materiali / Application: P1 - P2 - P3 - P4 - P5 / M1 - M2 - M3 / K3 - K4 / N2 - N3 / N7

N.B.: ≥ M8 centro femmina / ≥ M8 female center