

MASCHI A MACCHINA - MACHINE TAPS

MASCHI A MACCHINA **HSSE M35 5%Co**

SCANALATURE ELICOIDALI - ELICA DESTRA 40° - Imbocco "C"


Filettatura ISO 228/1 - GAS cilindrica BSP

MACHINE TAPS **HSSE M35 5%Co**


SPIRAL FLUTES - RIGHT HELIX 40° - Chamfer form "C"


ISO 228/1 - Whitworth pipe thread BSP

 HSSE



DIN 5156

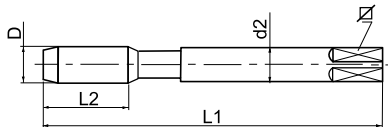

DIN 5156								4544.3	4544.V3	4544.T3	4844.3
D	filetti x 1" TPI	∅ mm	L ₁	L ₂	d ₂	∠		nudi / naked	ST	TIN	ISO 228 + 0,1
1/8	28	9,73	90	15	7,0	5,5	8,80	30,69	35,31	45,21	*
1/4	19	13,16	100	15	11,0	9,0	11,80	43,45	48,40	65,12	*
3/8	19	16,66	100	15	12,0	9,0	15,25	57,75	63,80	81,51	*
1/2	14	20,96	125	18	16,0	12,0	19,00	77,11	85,80	111,32	*
5/8	14	22,91	125	18	18,0	14,5	21,00	97,79	107,80	134,75	-
3/4	14	26,44	140	20	20,0	16,0	24,50	131,56	144,32	177,43	-
7/8	14	30,20	150	22	22,0	18,0	28,25	170,83	196,24	247,17	-
1"	11	33,25	160	24	25,0	20,0	31,00	231,77	249,70	311,30	-
1.1/4	11	41,91	170	24	32,0	24,0	39,50	378,18	396,33	-	-
° 1.1/2	11	47,80	190	27	36,0	29,0	45,50	545,82	581,68	-	-
° 2"	11	59,61	220	32	45,0	35,0	57,00	1024,76	1116,28	-	-
° Acciaio HSS / HSS Steel											
*Prezzo a richiesta / Price on demand											
Materiali / Application: nudo / naked: P1 - P2 - P3 - P4 / N1 - N2 / N6 - N7 ST: P1 - P2 - P3 - P4 / N1 - N2 / N6 - N7 TIN: P1 - P2 - P3 - P4 / K3 - K4 / N1 - N2 - N3 / N6 - N7											