

MASCHI A MACCHINA - MACHINE TAPS

MASCHI A MACCHINA

SCANALATURE ELICOIDALI - **ELICA DESTRA 45° / 48°** - Imbocco "C"

Filettatura ISO **228X** - GAS cilindrica BSP

MASCHIATURA RIGIDA SINCRONIZZATA

Universali - per INOX



MACHINE TAPS

SPIRAL FLUTES - **RIGHT HELIX 45° / 48°** - Chamfer form "C"

ISO **228X** - Whitworth pipe thread BSP


RIGID TAPPING SYNCHRO

Universal use - for **STAINLESS STEEL**

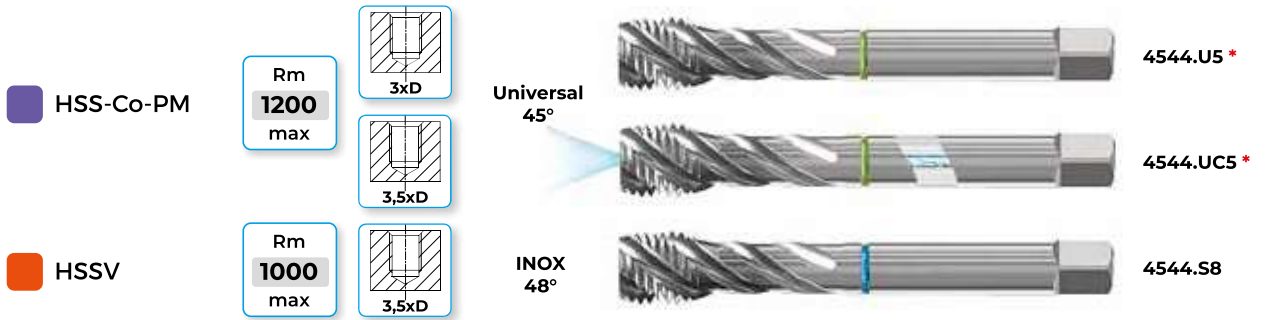

* Solo Universali
Only Universal Use

DIN 5156

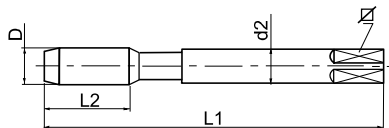

D	filetti x 1" TPI	Ø mm	DIN 5156					4544.U5	4544.UC5	4544.S8
			L ₁	L ₂	d ₂	∠		ASP30 + TX	ASP30 + TX	HSSV + HPC
1/8	28	9,73	90	15	7,0	5,5	8,80	62,59	97,79	54,67
1/4	19	13,16	100	15	11,0	9,0	11,80	90,20	129,14	75,57
3/8	19	16,66	100	15	12,0	9,0	15,25	114,40	154,00	91,74
1/2	14	20,96	125	18	16,0	12,0	19,00	154,99	199,98	131,01
3/4	14	26,44	140	20	20,0	16,0	24,50	251,68	312,51	207,24
1"	11	33,25	160	24	25,0	20,0	31,00	421,19	494,23	347,27

Materiali / Application: **4544.U5:** P1 - P2 - P3 - P4 - P5 / M1 - M2 - M3 / K3 -K4 / N2 - N3 / N7
4544.UC5: P1 - P2 - P3 - P4 - P5 / M1 - M2 - M3 / K3 -K4 / N2 - N3 / N7
4544.S8: P3 - P4 - P5 / M1 - M2 - M3 - M4