

## MASCHI A MACCHINA - MACHINE TAPS

MASCHI A MACCHINA **HSSE M35 5%Co**

SCANALATURE DIRITTE con IMBOCCO CORRETTO forma "B"

Filettatura metrica ISO/DIN 13 - UNI 4535 a passo grosso - **Tolleranza 6H + 0,20**

MACHINE TAPS **HSSE M35 5%Co**

STRAIGHT FLUTES SPIRAL POINT (GUN NOSE) - Chamfer form "B"

ISO Metric Coarse Thread - UNI 4535 - DIN 13 - **Tolerance 6H + 0,20**

 HSSE




4911.1  
4913.1




4911.T1  
4913.T1




4911.F1  
4913.F1




**DIN 371 D ≤ 10mm.**



**DIN 376 D ≥ 12mm.**

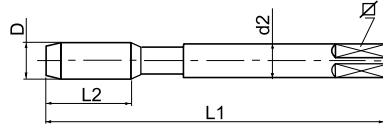

DIN 371 / DIN 376							4911.1	4913.1	4911.T1	4913.T1	4911.F1	4913.F1
D	p	L <sub>1</sub>	L <sub>2</sub>	d2	∅		nudi/naked	nudi/naked	TIN	TIN	HPC	HPC
3	0,5	56	10	3,5	2,7	2,50	*	-	*	-	*	-
4	0,7	63	13	4,5	3,4	3,30	*	-	*	-	*	-
5	0,8	70	13	6,0	4,9	4,20	*	-	*	-	*	-
6	1	80	16	6,0	4,9	5,00	*	-	*	-	*	-
8	1,25	90	18	8,0	6,2	6,80	*	-	*	-	*	-
10	1,5	100	20	10,0	8,0	8,50	*	-	*	-	*	-
12	1,75	110	25	9,0	7,0	10,30	-	*	-	*	-	*
14	2	110	28	11,0	9,0	12,00	-	*	-	*	-	*
16	2	110	28	12,0	9,0	14,00	-	*	-	*	-	*

\*Prezzo a richiesta / Price on demand

Materiali / Application: **nudo / naked:** P1 - P2 - P3 - P4 / N1 - N2 / N7

**TIN:** P1 - P2 - P3 - P4 / K3 - K4 / N1 - N2 - N3 / N6 - N7

**HPC:** P1 - P2 - P3 - P4 / M1 - M2 / K3 - K4 / N2 - N3 / N7