

## MASCHI A MACCHINA - MACHINE TAPS

MASCHI A MACCHINA **HSSE M35 5%Co**

SCANALATURE DIRITTE - Imbocco "C"

Filettatura ISO 7/1 - GAS conica **Rc** (BSPT) - Conicità 1:16

MACHINE TAPS **HSSE M35 5% Co**

STRAIGHT FLUTES - Chamfer form "C"

ISO 7/1 - Tapered Whitworth pipe thread **Rc** (BSPT) - Taper 1:16


 HSSE




4545.2




4545.F2

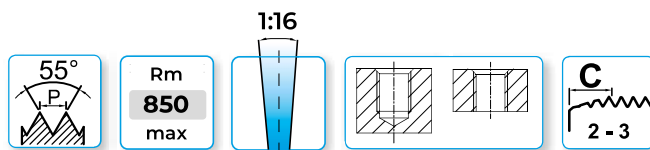

### NORMA DI FABBRICA - FIUM NORM



NORMA DI FABBRICA									4545.2	4545.F2
D	filetti x 1" TPI	Ø mm	L <sub>1</sub>	L <sub>2</sub>	d <sub>2</sub>	∠	C			HPC
1/8	28	9,73	90	13	7,0	5,5	10,1	8,20	54,78	73,15
1/4	19	13,16	100	20	11,0	9,0	15,0	11,00	63,36	94,82
3/8	19	16,66	110	20	12,0	9,0	15,4	14,50	77,99	107,14
1/2	14	20,96	125	26	16,0	12,0	20,4	18,00	99,88	146,74
3/4	14	26,44	140	28	20,0	16,0	21,7	23,50	159,61	229,13
1"	11	33,25	160	34	25,0	20,0	26,0	29,50	219,34	324,83

Materiali / Application: **nudi / naked:** P1 - P2 - P3 - P4 / K1 - K2 - K3 - K4 / N3 - N4 / N7 - N8  
**HPC:** P1 - P2 - P3 - P4 / M1 - M2 - M3 / K1 - K2 - K3 - K4 / N3 - N4 / N7 - N8