

MASCHI A MACCHINA - MACHINE TAPS

MASCHI A MACCHINA **HSSE M35 5%Co**

SCANALATURE DIRITTE - Imbocco "C"



Filettatura ANSI/ASME B1.20.3 - **NPTF** conica per tubi - Conicità 1:16 - "Dry Seal"

MACHINE TAPS **HSSE M35 5%Co**


STRAIGHT FLUTES - Chamfer form "C"


ANSI/ASME B1.20.3 - American tapered pipe thread **NPTF** - Taper 1:16 - "Dry Seal"

 HSSE

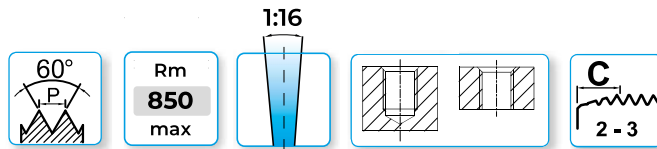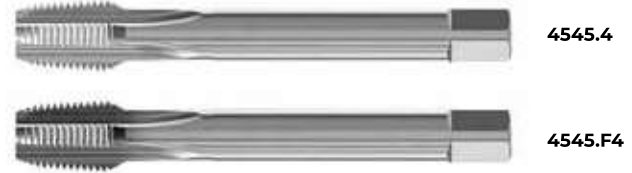

NORMA DI FABBRICA - FIUM NORM

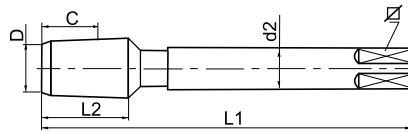

NORMA DI FABBRICA									4545.4	4545.F4
D	filetti x 1" TPI	Ø mm	L ₁	L ₂	d ₂	∇	C			HPC
1/8	27	10,29	90	13	7,0	5,5	9,3	8,45	54,78	73,15
1/4	18	13,72	100	20	11,0	9,0	13,5	10,90	63,36	94,82
3/8	18	17,15	110	20	12,0	9,0	13,9	14,30	77,99	107,14
1/2	14	21,34	125	26	16,0	12,0	18,1	17,60	99,88	146,74
3/4	14	26,67	140	26	20,0	16,0	18,6	23,00	158,40	-
1"	11,5	33,40	160	32	25,0	20,0	22,3	28,75	219,34	-
Altre dimensioni su richiesta / Other dimensions on demand										
Materiali / Application: nudi / naked: P1 - P2 - P3 - P4 / K1 - K2 - K3 - K4 / N3 - N4 / N7 - N8 HPC: P1 - P2 - P3 - P4 / M1 - M2 - M3 / K1 - K2 - K3 - K4 / N3 - N4 / N7 - N8										