

## M

## MASCHI A MACCHINA - MACHINE TAPS

MASCHI A MACCHINA **HSSE M35 5%Co**

SCANALATURE ELICOIDALI - **ELICA DESTRA 40°** - Imbocco "C"

Filettatura metrica ISO/DIN 13 - UNI 4535 a passo grosso - **6HX**

Rivestimento CrN per **INOX**

MACHINE TAPS **HSSE M35 5%Co**

SPIRAL FLUTES - **RIGHT HELIX 40°** - Chamfer form "C"

ISO Metric Coarse Thread - UNI 4535 - DIN 13 - **6HX**

CrN coated for **STAINLESS STEEL**



 HSSE




4512.S3


4514.S3




**DIN 371 D ≤ 10mm.**



**DIN 376 D ≥ 12mm.**

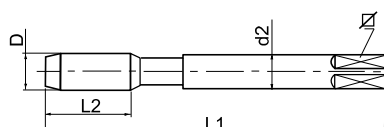

DIN 371 / DIN 376							4512.S3	4514.S3
D	p	L <sub>1</sub>	L <sub>2</sub>	d <sub>2</sub>	∅		CrN	CrN
3	0,5	56	5	3,5	2,7	2,50	30,14	-
4	0,7	63	7	4,5	3,4	3,30	30,14	-
5	0,8	70	8	6,0	4,9	4,20	30,14	-
6	1	80	10	6,0	4,9	5,00	30,14	-
8	1,25	90	13	8,0	6,2	6,75	34,87	-
10	1,5	100	15	10,0	8,0	8,50	42,90	-
12	1,75	110	18	9,0	7,0	10,25	-	53,24
14	2	110	20	11,0	9,0	12,00	-	71,39
16	2	110	20	12,0	9,0	14,00	-	79,31

Materiali / Application: P3 - P4 / M1 - M2 - M3

**N.B.:** ≥ M8 centro femmina / ≥ M8 female center