

## MASCHI A MACCHINA - MACHINE TAPS

MASCHI A MACCHINA **HSSE M35 5%Co**

SCANALATURE DIRITTE - Imbocco "C"



Filettatura ANSI/ASME B1.20.1 - **NPT** conica per tubi - Conicità 1:16

MACHINE TAPS **HSSE M35 5% Co**


STRAIGHT FLUTES - Chamfer form "C"


ANSI/ASME B1.20.1 - American tapered pipe thread **NPT** - Taper 1:16

 HSSE

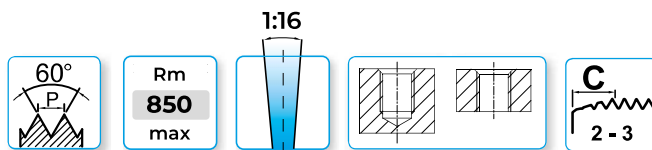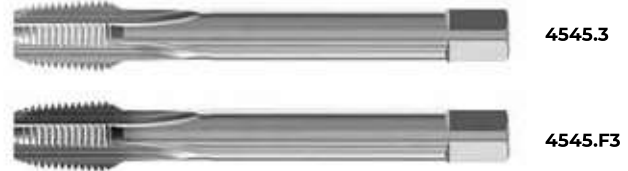

### NORMA DI FABBRICA - FIUM NORM

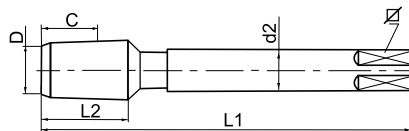

NORMA DI FABBRICA									4545.3	4545.F3
D	filetti x 1" TPI	Ø mm	L <sub>1</sub>	L <sub>2</sub>	d <sub>2</sub>	∠	C			HPC
1/8	27	10,29	90	13	7,0	5,5	9,3	8,50	54,78	73,15
1/4	18	13,72	100	20	11,0	9,0	13,5	11,00	63,36	96,36
3/8	18	17,15	110	20	12,0	9,0	13,9	14,50	77,99	107,14
1/2	14	21,34	125	26	16,0	12,0	18,1	17,90	99,88	146,63
3/4	14	26,67	140	26	20,0	16,0	18,6	23,20	159,61	229,13
1"	11,5	33,40	160	32	25,0	20,0	22,3	29,00	219,34	324,83
Altre dimensioni su richiesta / Other dimensions on demand										
Materiali / Application: nudi / naked: P1 - P2 - P3 - P4 / K1 - K2 - K3 - K4 / N3 - N4 / N7 - N8 HPC: P1 - P2 - P3 - P4 / M1 - M2 - M3 / K1 - K2 - K3 - K4 / N3 - N4 / N7 - N8										