

## MASCHI A MACCHINA - MACHINE TAPS

MASCHI A MACCHINA **HSSE M35 5%Co**

Imbocco "C"


Filettatura ASME B1.1 **8-UN / 12 UN - 2B**

MACHINE TAPS **HSSE M35 5%Co**

Chamfer form "C"

ASME B1.1 **8-UN / 12 UN - 2B**


 HSSE




Tagli diritti  
4583.0.8  
4583.0.12





Elica 40°  
4584.3.8

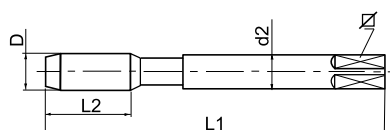

**DIN 2184/1**



DIN 2184/1						4583.0.8	4584.3.8	4583.0.12	
D	L <sub>1</sub>	L <sub>2</sub>	d <sub>2</sub>	∅		Tagli diritti 8 x 1" Straight flutes 8 x 1"	Elica 40° 8 x 1" Helix 40° 8 x 1"		Tagli diritti 12 x 1" Straight flutes 12 x 1"
7/8	125	25	18,0	14,5		-	-	20,10	95,04
1"1/16	140	25	20,0	16,0		-	-	24,90	152,35
1"1/8	180	40	22,0	18,0	25,40	166,98	216,26		-
1"3/16	150	28	22,0	18,0		-	-	28,00	203,94
1"1/4	180	40	22,0	18,0	28,60	210,76	277,53		-
1"5/16	170	30	28,0	22,0		-	-	31,20	265,54
1"3/8	200	50	28,0	22,0	31,75	280,17	369,27		-
1"1/2	200	50	28,0	22,0	34,90	319,22	424,60		-
1"5/8	200	50	32,0	24,0	38,10	394,02	517,00	39,20	392,37
° 1"3/4	200	50	36,0	29,0	41,30	475,20	602,14		-
° 1"7/8	225	60	36,0	29,0	44,45	566,50	723,80		-
° 2"	225	60	40,0	32,0	47,60	652,96	836,77		-
° 2"1/4	250	65	45,0	35,0	54,00	706,64	874,17		-
° 2"1/2	275	70	50,0	39,0	60,30	962,50	1232,33		-
° Acciaio HSS / HSS Steel									
Rivestimenti a richiesta / Coating on demand									
Materiali / Application: P1 - P2 - P3 - P4 / K4 / N2 - N3 / N7 - N8 / N11									