

MASCHI A MACCHINA - MACHINE TAPS

MASCHI A MACCHINA HSS-Co-PM

SCANALATURE ELICOIDALI - ELICA DESTRA 15° - Imbocco "C"

Filettatura ASME B1.1 a passo grosso UNC

Rivestimento TICN per TITANIO e leghe

MACHINE TAPS HSS-Co-PM

SPIRAL FLUTES - RIGHT HELIX 15° - Chamfer form "C"

ASME B1.1 Unified Coarse Thread UNC

TICN coated for TITANIUM and alloys






 HSS-Co-PM

2BX  **4564.XT1**




CRESTE ARROTONDATE
WITH ROUNDED CREST


3B  **4564.XJT1**




DIN 371 D ≤ 1/4 UNC

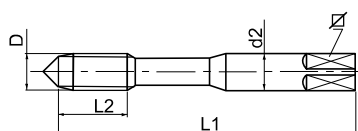

DIN 376 D ≥ 5/16 UNC

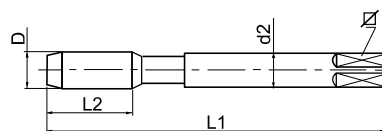

D	filetti x 1" TPI	DIN 371 / DIN 376					4564.XT1	4564.XJT1
		L ₁	L ₂	d ₂	∅		2BX	Filettatura UNJC - 3B
n. 6	32	56	11	4,0	3,0	2,85	40,15	42,90
n. 8	32	63	13	4,5	3,4	3,50	40,37	42,90
n. 10	24	70	13	6,0	4,9	3,90	40,15	42,90
1/4	20	80	16	7,0	5,5	5,10	40,15	48,40
5/16	18	90	18	8,0	6,2	6,60	48,73	-
3/8	16	100	20	10,0	8,0	8,00	52,14	-
7/16	14	100	20	8,0	6,2	9,40	60,72	-
1/2	13	110	25	9,0	7,0	10,80	66,55	-
5/8	11	110	28	12,0	9,0	13,50	92,73	-
3/4	10	125	32	14,0	11,0	16,50	122,65	-

Materiali / Application: P6 / M4 / K3 - K4 / N4 / N6 - N7 / S2 - S3 / S5

N.B.: ≥ 5/16 centro femmina / ≥ 5/16 female center